

96256597 MILO I 1X 2,4W 230/240V 1 LED AMB

LED 2W LED_abs	EN 60598	IP65	IK09		CE	
----------------	----------	------	------	---	----	--

Milo

Milo, the complete version with the gear integrated in the base, is a compact and fully sealed IP65 rated spotlight made from grey Aluminium, employing a amber, 2W LED. Due to the superior optical system, which is similar to camera optics, additional accessories are not needed to provide your desired beam control. Adjustment is simple using an Allen key.

It projects up to 10m, the optical system rotates 350° or inclines 130°.


Milo can be combined with the Gobo support accessory.

Dimensions: 189 x 110 x 149 mm


Weight: 1.2 kg.



TLG_MILO_F_I.jpg

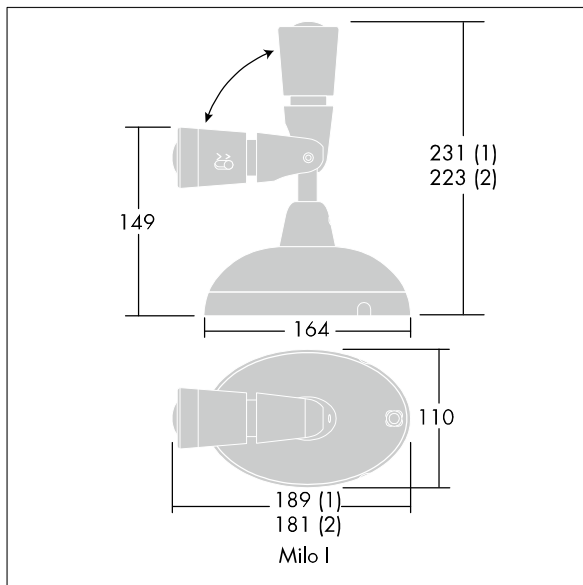

TLG_MILO_M_ILD1.wmf

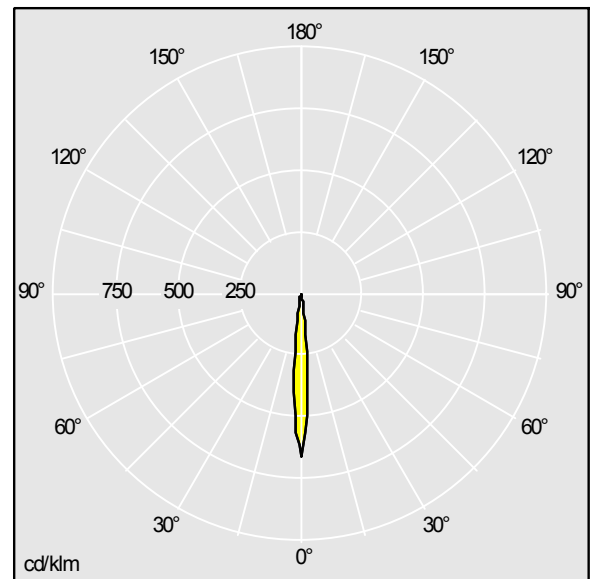

TLG_LA_MICIAM.ltd

Lamp position: Intensive

Light Source: LED

Total luminous flux*: 1000 lm

LOR: 0,03 ULOR: 0,00 DLOR: 0,03

Luminaire efficacy*: 14 lm/W

Lamp efficacy: 417 lm/W

Luminaire input power*: 2.4 W Lambda = 1

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.